

TECHNICAL DATA SHEET

TECHNISCHES DATENBLATT

Self-Adhesive UV-Protection Yellow Foil

YSA520E212

GENERAL INFORMATION

The self-adhesive UV protection yellow foil YSA520E212 was specially developed for UV photo-sensitive applications and blocks UV radiation below 520 nm. The UV-protective film YSA520E212 consists of yellow-dyed cellulose triacetate and is coated on one side with a permanent dispersion glue, thus it can bubble-free all-over laminated on all solid surfaces. By full-surface bonding as on windows, room dividers and screen elements, it provides a reliable UV protection even in demanding applications. Our self YSA520E212 UV blocking filter is commonly used in the field of photolithography, the PCB and microelectronics manufacturing and photoresist preparation and the handling of photoresists and diazofilms. Even in the pharmaceutical industry and laser technology, our self-adhesive YSA520E212 UV blocking filter allows a reliable protection against UV radiation below 520 nm.

FEATURES

- Blocks wavelengths below 520 nm (see semi-logarithmic graph next page)
- Outstanding optical purity
- High adhesion
- Long-term UV stable
- High inherent scratch resistivity

TECHNICAL DATA

Bond strength immediately:	~ 7.5 N / 25 mm
Bond strength after 7 days:	~ 15 N / 25 mm
Adhesive:	Acrylic-dispersion adhesive
Cover:	PE cover, red plaid in 10 mm grid
Max. width:	1080 mm
Temperature range during application:	15 °C
Temperature range :	-30 °C to +80 °C

CHEMICAL CHARACTERISTICS

The laminated yellow foil YSA520E212 is waterproof and resistant to most oils and greases, gasoline and aliphatic hydrocarbons. The surface of the yellow film is partially dissolved or swollen by hydrochlorofluorocarbons, ketones or aromatic solvents, which can affect the optical properties.


TECHNICAL DATA SHEET

TECHNISCHES DATENBLATT


OPTICAL TRANSMISSION

The transmission characteristics of our self-adhesive UV protection film yellow YSA520E212 are very close to our former yellow foil Y520E212, and were specially adapted to the stringent quality requirements in the area of the yellow rooms in e. g. photolithography / micro-electronics industry. The plot shown below is semi-logarithmic. At 450 nm wavelength, therefore, the transmission is close to the detection limit. If you compare our film with other "yellow" foils, we recommend to ask for a semi-logarithmic transmission plot.

Semi-logarithmic transmission graph

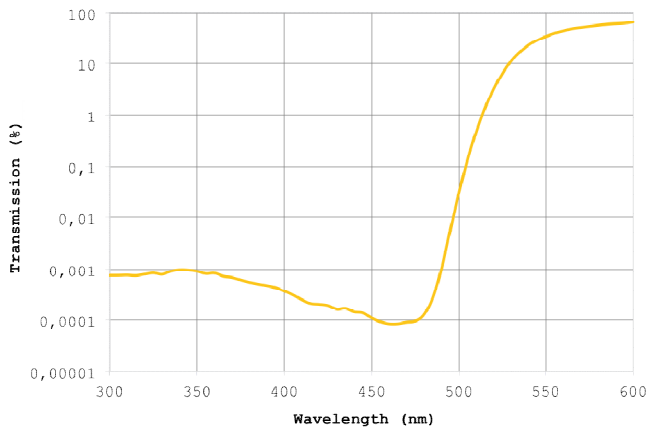

lineare transmission graph

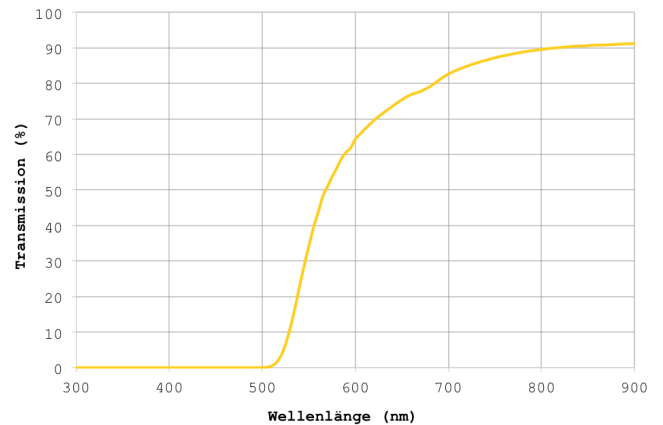

This transmission spectrum is not to be seen as specification, but as exemplaric measurement of a certain lot of our yellow foil.

FIRE BEHAVIOR

The laminated self UV protection film yellow YSA520E212 is self-extinguishing.

STORAGE

Under proper storage conditions of 5 - 25 °C and a relative humidity of 30 - 60%, the UV protection film YSA520E212 has a shelf life of up to one year. To avoid pressure points, we recommend a standing or hanging storage.

INSTALLATION

The yellow foil YSA520E212 can be glued with our mounting fluid DX MF 301 easily and bubble-free on any smooth and solid surfaces. Detailed information is available in our assembly instructions for self-adhesive UV protection film yellow YSA520E212.

For filtering fluorescent tubes, we recommend our specially designed polycarbonate sleeves. Here, our UV protective film Yellow Y520E212 is already incorporated, so you can cost-effectively "upgrade" standard white fluorescent tubes for your yellow light application .

TECHNICAL DATA SHEET

TECHNISCHES DATENBLATT



SALES UNITS

Article-number:	Rolls (Width: 1,08 m)
GE212001SA	1 m
GE212005SA	5 m
GE212010SA	10 m
GE212015SA	15 m
GE212020SA	20 m
GE212100SA	100 m
GE2120ZSA	1,08 m x ... Pre-cut (running meters)

Further Information

All data and information relate to the best of our knowledge and are based on measurement and experience. It remains in your responsibility to check the suitability of our yellow foil for the intended use of it. Our products are regularly quality-tested and further developed. We therefore reserve the right to adjust without additional information, the chemical composition or physical characteristics of new knowledge.

For any further information please contact our technical advisory.

Your request by E-Mail or Phone.

E-Mail: info@lithoprotect.com

Phone: +49 (0) 731 3608 0916

The brand Lithoprotect® belongs to:

durXtreme

durXtreme GmbH
Nicolaus-Otto-Str. 39
89079 Ulm
Germany